rd Floor

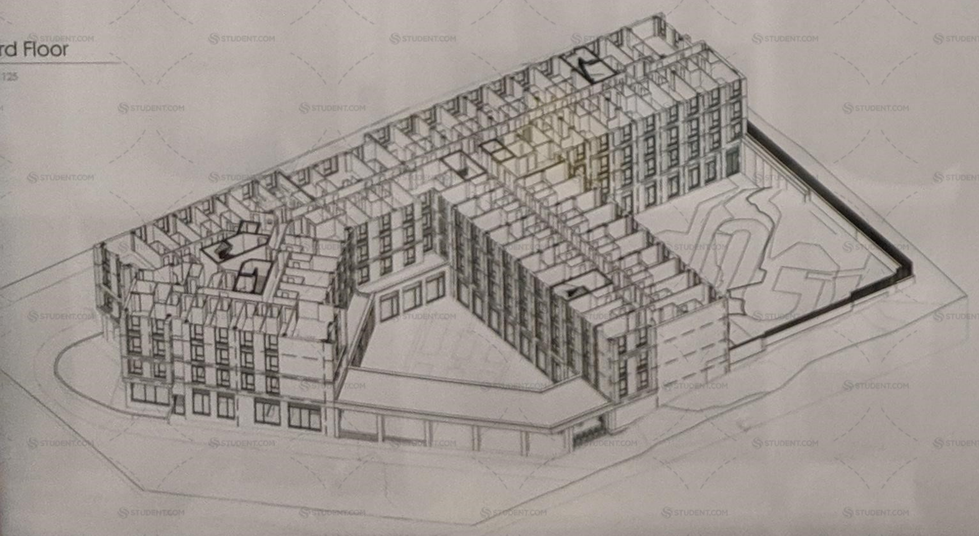

CDM - Designer Notes Design Element	Hazard	Period	Risk Management Owner	Action
Brickwork at High Level	Falls from Height	Construction	Principle Contractor	Consider use of scaffold and recommendations from supplier for fall provisions
Cladding at High Level	Falls from Height	Construction	Principle Contractor	Consider use of scaffold and recommendations from supplier for fall provisions. Consider pre-cut modules to reduce number of operatives working at height, and time working at height. Cladding panel size to be standardised and minimised to aid handling and installation at high level.
Window Maintenance	Falls from Height	Construction/Occupancy	Principle Contractor / End User	See cleaning and maintenance strategy - cleanable from inside.
Floor to Service Risers	Falls from Height	Construction/Occupancy	Principle Contractor / End User	Provide floor to all service risers with services fully fire stopped
Brickwork Decorations/Features	Installation of Decorations/Features	Construction	Principle Contractor	Limit risk with solvent free paints. All joinery should be prefabricated off site and